



BRIVO ONAIR CAM

Brivo platform solution that links video to access control events

Camera to Cloud Recording for the Brivo Onair Platform

Brivo Onair Cam delivers the simplicity of direct camera to cloud video recording and storage. Businesses can easily link important access control events with recorded video and remotely check a live video feed to better protect their facilities.



INDOOR & OUTDOOR POE DOME

B-OAC-INDM-2.8
B-OAC-INDM-3.6
B-OAC-OUTDM-2.8
B-OACS-OUTDM-3.6



OUTDOOR POE BULLET

B-OAC-OUTBLT-3.6




INDOOR WIRELESS CUBE

B-OAC-INCB-TXR-2.8

APPLICATIONS & BENEFITS

- Perfect for sites with lower camera counts needing reliable off-site video storage
- Offers the benefits of HD cameras and cloud storage without the cost and maintenance of local recording equipment
- Provides a quick and simple process to link access control doors with the associated video cameras
- Reduces incident review time with a two-click process to select and play the video clip associated with important access control events
- Offers the flexibility to choose from three video resolutions from 480p to 1080p and eight retention options from seven days to two years
- Wireless (transformer) and wired (PoE) camera options available

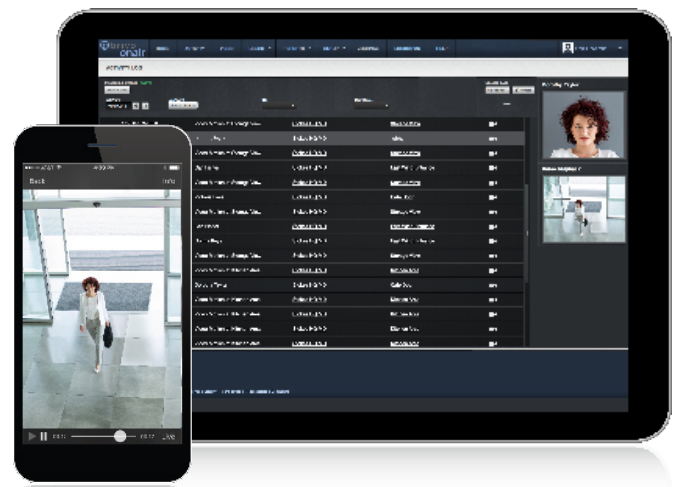

BRIVO ONAIR CAM SPECIFICATIONS

BRIVO ONAIR CAM SOFTWARE SPECIFICATIONS	
Software updates	Automatic
Link Onair access/alarm events to video	Yes
Re-play video clips and search for video in Brivo UI	Yes
View live and event video	Yes
Site camera counts	Typically 6 cameras or less
Need for on-premise gateway	No
Video storage	Offsite
Recording resolutions	Plans available for SD (480p), HD1 (720p), and HD2 (1080p)
Recommended bandwidth averages	SD = .5 mbps, HD1 = 1 mbps, HD2 = 2 mbps
Recording type	Continuous or event-based
Recording retention	Plans available for 7 to 730 days of storage

BRIVO ONAIR CAM DEVICE SPECIFICATIONS			
	Indoor & Outdoor POE Dome	Outdoor POE Bullet	Indoor Wireless Cube
Pixels	4 Mega Pixels	4 Mega Pixels	2 Mega Pixels (supports up to 1080p)
Lens	2.8mm or 3.6mm	3.6mm	2.8mm
Field of view	90 degrees	85 degrees	95 degrees
Iris	Fixed	Fixed	Fixed
Interface	Waterproof RJ-45 Female 10/100 Base-T	Waterproof RJ-45 Female 10/100 Base-T	RJ-45 Female 10/100 Base-T and WiFi
Power	DC12V/Power over Ethernet	DC12V/Power over Ethernet	DC12V/Power over Ethernet
Waterproof	IP65 (outdoor models only)	IP66 model	Not waterproof



Call us at **866.692.7486** to learn more about Brivo Onair Cam